



TANZO 2.0

STEAM STERILIZER



WOSON MEDICAL INSTRUMENT CO.,LTD.

Add: NO.25, Lane 300, Jinshan Road, Jiangbei District, Ningbo 315032, China

Tel: 86-574-8302 2668

Fax: 86-574- 8763 9376

E-mail: overseas@woson.com.cn

Web: www.wosongroup.com



© WOSON. All right reserved.

This Booklet For Information Printed Publicity Materials, We Reserve The Right To Update The Product Design And Specification, The Product In Kind Prevail, WOSON Medical Instrument Co., LTD. All Rights Reserved!

Willing To Smile

TANZO TOUCH 2.0

STEAM STERILIZER



Pipes Auto-cleaning
Smart Maintenance Reminder



Technical Parameters

Model	Voltage/Power	Chamber Size	Outside Size	Packing Size	Net Weight
TOUCH 2.0 18L	220V/1800W	Φ245X360mm	560X470X400mm	655X560X495mm	47 kg
TOUCH 2.0 23L	220V/2000W	Φ245X470mm	675X470X400mm	765X560X495mm	53 kg



Product Parameters

Sterilization Class	class B
Special Program	HIV, HBV long-sterilization program
Display	High-light LCD colorful touching screen
Control Precision	Temperature: 0.1°C, Pressure: 0.001bar
Safety System	Door lock system, Pressure lock system, Relief valve, Pressure and temperature overload protection, Alarm system, Magnetic lock
Loading Device	Circle type with 4 trays
Noise	< 50db

Sterilization Temperature	121°C 134°C
Dry System	Powerful vacuum drying
Testing System	Bowie & Dick Test, Vacuum Test, Helix Test
Sterilization Data	USB flash drive, Built-in mini printer
Water Supply System	Built-in water tank easy to clean, capacity 3.5 or 4L.
Chamber	Medical stainless steel 304, Max working pressure: 2.3bar, Min working pressure: -0.9bar, Max temperature: 145°C
Water Consumption	0.16L~0.18L (Laboratory data)

TANZO TOUCH 2.0


STEAM STERILIZER



New Operation System



Brand new 3S operating system, graphical operation interface and smart user interface makes it easier to operate

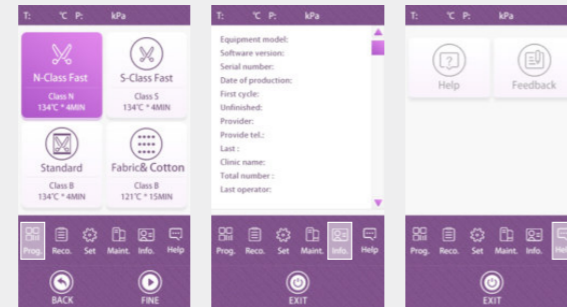

Suitable for the following Instruments and Items



Solid



Hollow



Packed



Fabric & Cotton


Smart Menu



Smart and simple menu showing the details of programs, easy to select

Illustrated program information

Graphic function icons

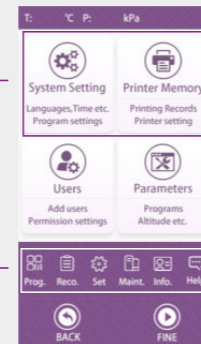

Accurate Program Control




Sterilization procedure real-time display

0.5 ms refresh rate, in the maximum use of sensor performance, provides accurate data reference

Pressure accuracy grade 0.001bar and 0.1°C level temperature accuracy to understand all changes in autoclave chamber


Double Temperature Sensors placed in different positions to ensure even heating of the chamber, also an important diagnosis key to successful sterilization

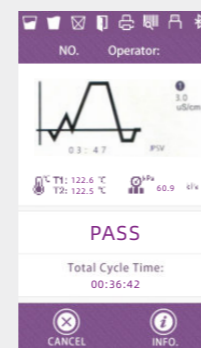

Standby Mode



Power-saving and environmentally-friendly. Optional standby mode makes it more convenient for users to choose a personalized energy saving program



Large LCD Display



101mm × 81mm LCD display, which highlights the fashion and texture of the whole sterilizer. The multi-language control interface makes the sterilization procedure more intuitive and brings a more convenient operating experience



TANZO TOUCH 2.0


STEAM STERILIZER

Intelligent Diagnosis System

Parts Auto-diagnosis function.
Locates defective components, shows error messages and solution tips, which makes the after-sales information more detailed and the maintenance more convenient



Diverse Test Systems



Smart Maintenance System

Fully automatic pipeline-cleaning.
Maintenance reminding function, general service after 2 years or 4000 cycles



Multi-Language System

Multiple languages to choose, meeting various needs from different countries and regions



Reverse Osmosis Water Purifier (Optional)

5 filters inside, 5 layers safeguard
purification rate: 95.7%, meet the sterilization cycle water need Water Conversion rate: 11L/h

- Polypropylene melt-blown filter
- Granular activated carbon filter
- Sintered compressed activated carbon filter
- Composite reverse osmosis membrane filter



TANZO CLASSIC STEAM STERILIZER



Smart Sterilization System
Experience The Extraordinary Feeling Of Sterilization



Technical Parameters

Model	Voltage/Power	Chamber Size	Outside Size	Packing Size	Net Weight
CLASSIC 2.0 18L	220V/1800W	Φ245X360mm	560X470X400mm	655X560X495mm	47 kg
CLASSIC 2.0 23L	220V/2000W	Φ245X470mm	675X470X400mm	765X560X495mm	53 kg



Product Parameters

Sterilization Class	class B	Sterilization Temperature	121°C 134°C
Special Program	HIV, HBV long-sterilization program	Dry System	Powerful vacuum drying
Display	High-light LED panel	Testing System	Bowie & Dick Test, Vacuum Test, Helix Test
Control Precision	Temperature: 0.1°C, Pressure: 0.001bar	Sterilization Data	USB flash drive, Built-in mini printer
Safety System	Door lock system, Pressure lock system, Relief valve, Pressure and temperature overload protection, Alarm system	Water Supply System	Built-in water tank easy to clean, capacity 3.5 or 4L.
Loading Device	Circle type with 4 trays	Chamber	Medical stainless steel 304, Max working pressure:2.3bar, Min working pressure: -0.9bar, Max temperature: 145°C
Noise	< 50db	Water Consumption	0.16L~0.18L (Laboratory data)

TANZO CLASSIC STEAM STERILIZER

High Precision Sensors



Germany made Heraeus temperature sensor allows temperature accuracy up to 0.1°C
U.S. made Freescale pressure sensor allows pressure accuracy up to 0.001bar

0.1
Degree

0.001
Bar



Water Quality Sensor



The autoclave will not work if the water quality is below standard, thus protecting the steam generator and extending the product life



Informative Digital Display



Highlighted LED display screen, concise display of sterilization process each stage, graphical buttons provide more convenient operation



Optimized Sterilization Speed



Performance optimizing system improves heating efficiency
Which shortens the sterilization time by 20%
Better adapts to the requirements of sterilization time for planting instruments



Optimized
Sterilization Speed



Multiple Record Output



Standard USB interface and optional built-in mini printer (standard for Touch 2.0), direct output sterilization data



USB



Printer