



TANCY

STEAM STERILIZER



WOSON MEDICAL INSTRUMENT CO.,LTD.

Add: NO.25, Lane 300, Jinshan Road, Jiangbei District, Ningbo 315032, China

Tel: 86-574-8302 2668

Fax: 86-574- 8763 9376

E-mail: overseas@woson.com.cn

Web: www.wosongroup.com



© WOSON. All right reserved.

This Booklet For Information Printed Publicity Materials, We Reserve The Right To Update The Product Design And Specification, The Product In Kind Prevail, WOSON Medical Instrument Co., LTD. All Rights Reserved!

Willing To Smile

TANCY TOUCH STEAM STERILIZER



Mini B Class autoclave,
as fast as you can expect



Technical Parameters


Model	Voltage/Power	Chamber Size	Outside Size	Packing Size	Net Weight
TANCY TOUCH 2L	220V/1800W	192.5X45.5X300mm	530X450X170mm	750X520X230mm	23kg



Product Parameters

Sterilization Class	class B	Sterilization Temperature	121°C, 134°C
Special Program	HIV, HBV long-sterilization	Dry Program	Strong Vacuum Drying
Display	4.3 inch high-light LCD, Colorful touch screen	Test Program	Bowie&Dick Test, Vacuum Test, Helix Test
Control Precision	Temperature: 0.1°C, Pressure: 0.1kpa	Sterilization Data	External Printer (Optional)
Safety System	Relief Valve, Motor Lock, Pressure and Temperature Overload Protection, Alarm System	Water Supply System	External Water Tank (Optional)
Rack & Trays	1 Tray	Chamber	Medical Grade Aluminum Alloy, Max.temperature:145°C, Max.Working Pressure:230kpa, Min.Working Pressure: -0.90kpa(Optional)

TANCY TOUCH STEAM STERILIZER

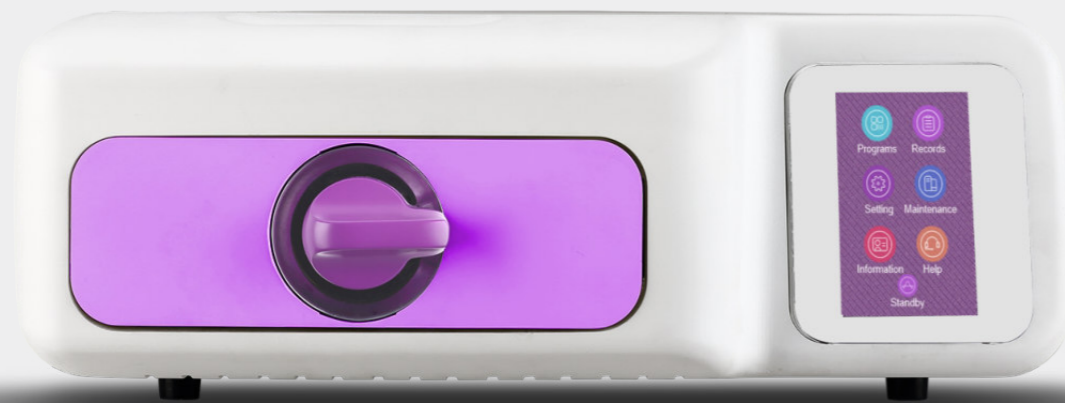

Product Performance

Chamber Material: Medical Grade Aluminum Alloy 6061

Lightweight and durable, easy coating, high strength and strong corrosion resistance

Commonly used in aircraft parts, ship accessories, precision instruments, etc

Split heating membranes in chamber, heating faster and more even

Drawer-shape design, simple and easy operation

Motor lock system, keep the door shut during entire cycle time, no matter if pressure is positive or negative



Chamber Heating Membranes



Drawer Shape Tray



Motor Lock System

Operating System

The newly designed humanized UI makes the whole operating system more intelligent

Touch screen control with smart reminder, provides easier operating experience



Touch Control



Smart Reminder

TANCY TOUCH STEAM STERILIZER



More Functions

USB Interface

Optional External Printer

Optional Water Quality Sensor

More functions when connected to network



External Printer

Speedy Sterilizing Experience

Program	Temperature	Pressure	Vacuum Time	Sterilization Time	Dry Time	From Cold	From Warm
N Class	134°C	210kPa	0	4mins	0	8mins	6mins
S Class	134°C	210kPa	1	4mins	0	10mins	8mins
B Class 134°C	134°C	210kPa	3	4mins	9mins	25mins	23mins
B Class 121°C	121°C	110kPa	3	20mins	18mins	45mins	43mins

※ The Above Are Laboratory Data